



## CP 130 SLIDING DOOR

Imagine looking out onto your garden through a wall of glass... Reynaers sliding doors can go a long way to make this into a reality. Our sliding doors are designed to offer industry-leading maximum sizes, and with these huge panes of glass come uninterrupted, panoramic views and lots of natural daylight.

## EASY OPERATION

At first glance, one brand of sliding door may appear similar to the next, but looks can be deceiving. When you open and close the doors, the difference is immediately evident.

The ease of opening and closing a Reynaers CP 130 door, particularly one that is fitted with the lift-and-slide mechanism, can be enough to make you smile. Reynaers lift and slide doors have a longer handle which, when turned through 180 degrees, lifts the door slightly, reducing the friction and allowing the door to open and close with the lightest of touches.

## RELIABILITY AS STANDARD


Not only are the doors designed to perform to the highest standards, the component parts are also made from only the best materials. The stainless steel rollers, for example, have been tested to thousands of cycles, so you can be confident that the door will keep opening and closing smoothly for years to come.

## CONFIGURATIONS


Reynaers CP 130 sliding door is available as a single-, double- or triple-track system with the following configurations. We recommend you discuss the options with your retailer, who should be able to offer some advice regarding which options best fit your particular opening.




### MONORAIL



### DUO RAIL

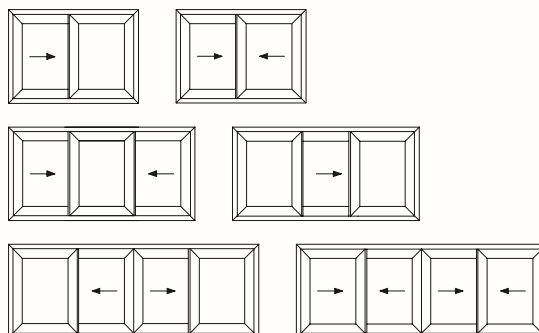

### 3-RAIL



## PERFORMANCE

U-VALUE - TRIPLE-GLAZED <sup>7</sup>	Down to 1.1 W/m <sup>2</sup> K
U-VALUE - DOUBLE-GLAZED <sup>8</sup>	Down to 1.5 W/m <sup>2</sup> K
U <sub>f</sub> -VALUE (EN ISO 10077-2) <sup>1</sup>	Down to 2.35 W/m <sup>2</sup> K
SECURITY <sup>3</sup>	RC2, PAS24 and Secured by Design
AIR-TIGHTNESS (EN12207) <sup>6</sup>	Class 4 (600Pa)
WIND-RESISTANCE (EN12210; EN12211) <sup>5</sup>	Up to class C3
WATER-RESISTANCE (EN12208) <sup>4</sup>	Up to class 9a (600Pa)
ACOUSTIC PERFORMANCE (EN ISO 140-3; EN ISO 717-1) <sup>2</sup>	R <sub>w</sub> (C; C <sub>tr</sub> ) = 35 (-2; -6) / 39 (-1; -3)



## KEY FEATURES

- ✓ Rigorously tested to offer the highest levels of performance
  - ✓ Industry-leading thermal insulation
  - ✓ Industry-leading weather resistance
    - ✓ Industry-leading security - SBD
    - ✓ Industry-leading maximum sizes
    - ✓ Optional slim meeting section
  - ✓ Double- and triple-glazed options
- ✓ High-quality stainless steel sliding mechanism
  - ✓ Choice of slide and lift-and-slide operation
    - ✓ Flexible design options
    - ✓ Strong and durable
  - ✓ Smooth, reliable operation
    - ✓ Low-maintenance
- ✓ Comprehensive range of handles and accessories
  - ✓ Literally hundreds of colour options
- ✓ Dual-colour option - different colour inside and out

### REYNAERS LTD

111 Hollymoor Way, Northfield, Birmingham B31 5HE

**T:** 0121 421 1999 **E:** reynaersltd@reynaers.com

[www.reynaers.co.uk](http://www.reynaers.co.uk)